

OPTIONS

Construction:

• carbon steel (s235Jr)

Seat and backrest:

- soft wood
- hardwood of European origin
- hard wood (oil finish)
- premium hard wood

Methods of installation:

• attached by bolts to foundation

DESCRIPTION

02.083 project is a retro style **steel bench** with original and elegant visual aspect. Construction of the bench and the backrest is made from steel bars section (available in all RAL palette standard colours). Seating section is made of pine, spruce softwood or exotic hardwood. The soft lines of this bench invite people to make a simple habit of using it when they want to take a break in the city. For sure it will be a perfect garden street furniture bench.





Dimensions:

- width: 60 cm
- length: 205 cm
- height: 90 cm

Weight:

- 62 kg

Materials:


- carbon steel
- chemically cured paint
- softwood planks





Product: Skała bench Catalog number: **02.083**

In accordance with the Polish Law on Copyright and Related Rights of 04.02.1994 (Offcial Journal of Laws No. 24, item 83, corrected: Journal of Laws No. 43, item 170) and in accordance with the EU copyright legislation including all EU directives and regulations on copyright , Zano Mirosław Zarotynski Company, reserves the copyright of drawings, descriptions, 3D models, renderings, graphics, content contained in offers, attachments to offers and all other documents. Its content is the intellectual property of ZANO Mirosław Zarotinski company. The use of author's ideas, solutions, copying, distribution of photos, graphics or fragments of graphics, descriptive texts, for profit, without the permission of the author - ZANO Mirosław Zarotynski company - is prohibited and constitutes a copyright infringement and is punishable.

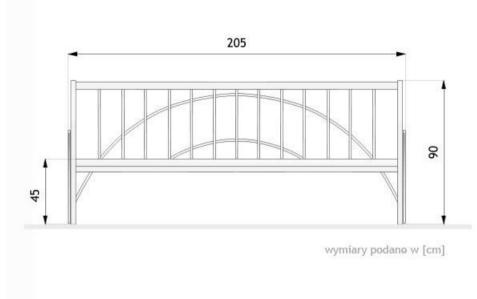



MOUNTING DIAGRAMS (A, B, C, D) FOR SCREW MOUNTING

NOTE: The drawings do not reflect the actual dimensions of the foundation. They are only exemplary assembly schemes taking into account the type of anchoring and the substrate material to which the furniture is to be fixed.

The size of the foundation depends on the local foundation conditions.









INSTALLATION INTO PAVING WITH FOUNDATION

Description of the assembly

- 1. ZANO product
- 2. Quick-action fastener or chemical anchor
- 3. Stone paving / concrete paving / stone slabs / concrete slabs
- 4. Sand ballast (approx. 2 4 cm)
- 5. Stone aggregate substructure
- **6.** Concrete foundation, class C16/20 (top surface concrete 10 cm below paving surface)
- 7. Ground

INSTALLATION TO PAVING

Description of the assembly

- 1. ZANO product
- 2. Quick-action fastener or chemical anchor
- **3.** Stone paving / concrete paving / stone slabs / concrete slabs
- 4. Sand ballast (approx. 2 4 cm)
- 5. Stone aggregate substructure
- 6. Ground

CONCRETE / ASPHALT MOUNTING

Description of the assembly

- 1. ZANO product
- 2. Quick-action fastener or chemical anchor
- **3.** Fixed hardened surface e.g. concrete or asphalt
- Concrete foundation, class C16/20 (top surface concrete 10 cm below paving surface)
- 5. Stone aggregate substructure
- 6. Sand ballast (approx. 2 4 cm)
- 7. Ground

MOUNTING TO CONCRETE FOUNDATION

Description of the assembly

- 1. ZANO product
- 2. Quick-action fastener or chemical anchor
- **3.** Concrete foundation, class C16/20 (top surface concrete 10 cm below paving surface)
- 4. Ground