



OPTIONS

Construction:

- carbon steel (s235Jr)
- stainless steel (Aisi 304)

Seat:

- European coniferous wood
- hardwood of European origin
- oiled exotic wood
- premium exotic wood

Mounting method:

- to screw


DESCRIPTION


The Travetto bench showcases timeless elegance with its classic lines, ideal for enhancing any modern urban setting.

Travetto features a mix of wood and steel in its construction. Available in either black or stainless steel, this bench exceeds the usual length at **3 yards**, making it stand out from similar offerings.

The vertically aligned wooden planks composing the seating area are noted for their **enhanced durability** against bending. These planks are held together with a stainless steel bar which serves to keep them evenly spaced and **adds robustness to the structure**. The seat is supported by three short planks, providing optimal back support, making it look less cumbersome despite its substantial weight.

A unique aspect of the bench is its **modular design**, allowing the connection of multiple units to stretch, for instance, up to **15 yards in length**. Both the wood and steel are treated with special finishes to withstand harsh weather conditions, with the steel also featuring sturdy galvanization and customizable powder coating available in any shade from the Ral color spectrum....

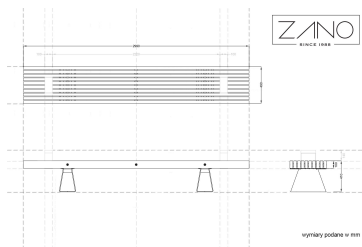

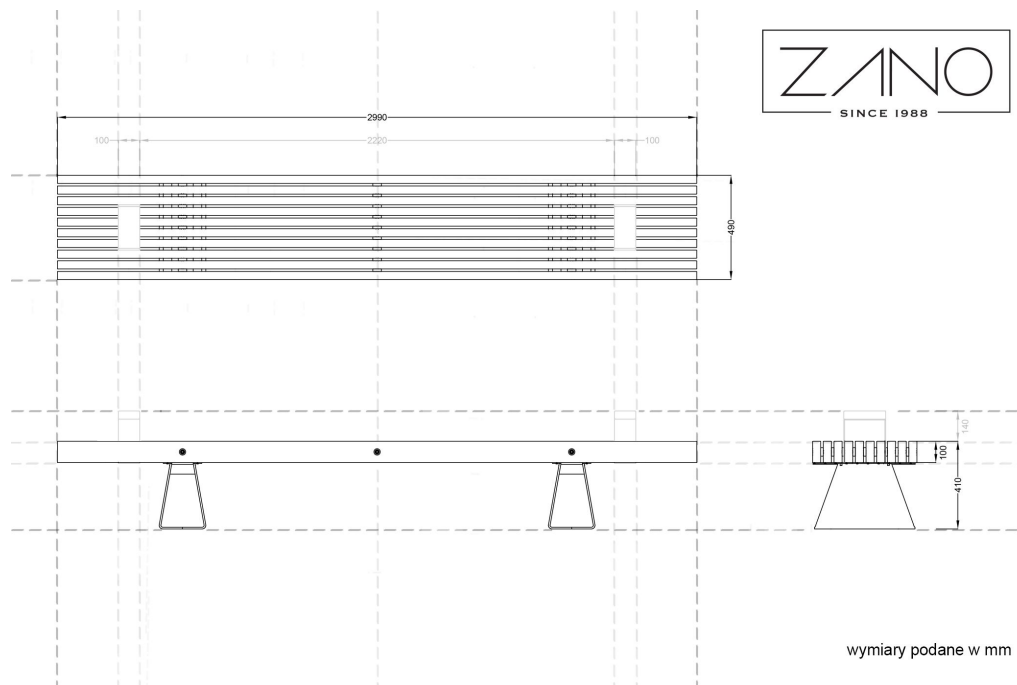

GENERAL TECHNICAL DATA

Dimensions:

- width: 19 1/4 in
- length: 117 3/4 in
- height: 16 1/4 in

Weight:

- 231 lb

Materials:

- wood: European coniferous or exotic
- carbon steel (s235jr) - carbon steel ASTM A36
- stainless steel (1.4301) - stainless steel AISI 304SS

ZANO



Filip Babiarz

Product: Bench Travetto
Catalog number: **02.407**
Designer: Filip Babiarz

In accordance with the Polish Law on Copyright and Related Rights of 04.02.1994 (Official Journal of Laws No. 24, item 83, corrected: Journal of Laws No. 43, item 170) and in accordance with the EU copyright legislation including all EU directives and regulations on copyright, Zano Miroslaw Zarotynski Company, reserves the copyright of drawings, descriptions, 3D models, renderings, graphics, content contained in offers, attachments to offers and all other documents. Its content is the intellectual property of ZANO Miroslaw Zarotynski company. The use of author's ideas, solutions, copying, distribution of photos, graphics or fragments of graphics, descriptive texts, for profit, without the permission of the author - ZANO Miroslaw Zarotynski company - is prohibited and constitutes a copyright infringement and is punishable.



NOTE: The drawings do not reflect the actual dimensions of the foundation. These are only sample installation diagrams taking into account the type of anchoring and the material of the substrate to which to attach the furniture.

The size of the foundation depends on local foundation conditions.



INSTALLATION TO PAVING WITH FOUNDATION

Installation description

1. ZANO product
2. Quick-attachment / quick-attachment or chemical anchor
3. Stone paving / concrete paving / stone slabs / concrete slabs
4. Sand ballast (approximately 2 - 4 cm)
5. Stone aggregate substructure
6. Concrete foundation of C16/20 class (top surface of concrete 10 cm below paving surface)
7. Local land



MOUNTING TO PAVING

Installation description


1. ZANO product
2. Quick-attachment / quick-attachment or chemical anchor
3. Stone paving / concrete paving / stone slabs / concrete slabs
4. Sand ballast (approximately 2 - 4 cm)
5. Stone aggregate substructure
6. Local land



MOUNTING TO CONCRETE / ASPHALT

Installation description

1. ZANO product
2. Quick-attachment / quick-attachment or chemical anchor
3. Fixed restrained surface, such as concrete or asphalt
4. Concrete foundation of C16/20 class (top surface of concrete 10 cm below paving surface)
5. Stone aggregate substructure
6. Sand ballast (approximately 2 - 4 cm)
7. Local land

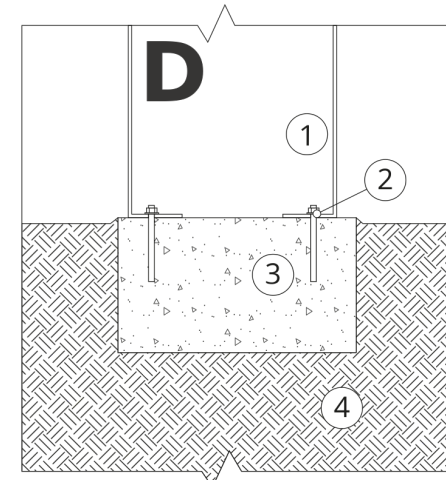

MOUNTING TO CONCRETE FOUNDATION

Installation description

1. ZANO product
2. Quick-attachment / quick-attachment or chemical anchor
3. Concrete foundation of C16/20 class (top surface of concrete 10 cm below paving surface)
4. Local land