

BENCH ORIGAMI 02.460.5 ZANO URBAN FURNITURE

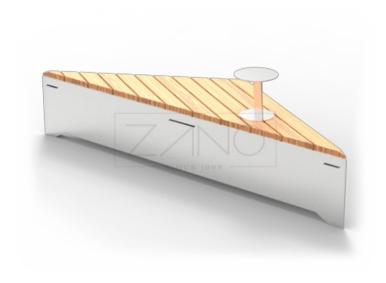



OPTIONS

Construction:

- carbon steel (s235Jr)
- o stainless steel (Aisi 304)

Seat:

- European coniferous wood
- hardwood of European origin
- oiled exotic wood
- o premium exotic wood

Mounting method:


to screw


DESCRIPTION


The Origami line of benches caters to the stringent requirements of contemporary urban architecture. It features modularity and an innovative design, with options available for different element heights. By using elements from the Origami line, which includes pots and benches, you can create a variety of shapes based on an isosceles triangle. This fusion of characteristics enables the creation of unique, engaging spaces that are both user-friendly and aesthetically striking. Assembling the modules can result in a compact amphitheater or a lengthy tiered platform interspersed with plant life. Alternatively, you can opt for the traditional bench equipped with a comfortable backrest, a staple in this collection. The range of supplementary components allows for the installation of robust tables, and there are also modules available for incorporating USB ports and 230V outlets.

BENCH ORIGAMI 02.460.5 ZANO URBAN FURNITURE



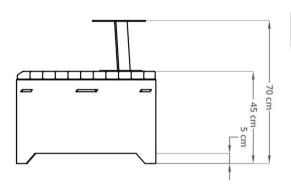





GENERAL TECHNICAL DATA

Dimensions:

- height: 17 ³/₄ in - depth: 26 ³/₄ in

- length of the longer side: 92 $^{\rm 1/_2}$ in - length of the shorter side: 53 $^{\rm 1/_2}$ in

- height of the table: $9^{3}/_{4}$ in - table diameter: $9^{3}/_{4}$ in

Materials:

- construction - stainless steel or carbon steel

ZANO



Product: Bench Origami Catalog number: **02.460.5** Designer: Filip Babiarz

In accordance with the Polish Law on Copyright and Related Rights of 04.02.1994 (Official Journal of Laws No. 24, item 83, corrected: Journal of Laws No. 43, item 170) and in accordance with the EU copyright legislation including all EU directives and regulations on copyright , Zano Miroslaw Zarotynski Company, reserves the copyright of drawings, descriptions, 3D models, renderings, graphics, content contained in offers, attachments to offers and all other documents. Its content is the intellectual property of ZANO Miroslaw Zarotinski company. The use of author's ideas, solutions, copying, distribution of photos, graphics or fragments of graphics, descriptive texts, for profit, without the permission of the author - ZANO Miroslaw Zarotynski company - is prohibited and constitutes a copyright infringement and is punishable.

NOTE: The drawings do not reflect the actual dimensions of the foundation. These are only sample installation diagrams taking into account the type of anchoring and the material of the substrate to which to attach the furniture.

The size of the foundation depends on local foundation conditions.









INSTALLATION TO PAVING WITH FOUNDATION

Installation description

- 1. ZANO product
- 2. Quick-attachment / quickattachment or chemical anchor
- **3.** Stone paving / concrete paving / stone slabs / concrete slabs
- **4.** Sand ballast (approximately 2 4 cm)
- 5. Stone aggregate substructure
- **6.** Concrete foundation of C16/20 class (top surface of concrete 10 cm below paving surface)
- 7. Local land

MOUNTING TO PAVING

Installation description

- 1. ZANO product
- Quick-attachment / quickattachment or chemical anchor
- 3. Stone paving / concrete paving / stone slabs / concrete slabs
- **4.** Sand ballast (approximately 2 4 cm)
- 5. Stone aggregate substructure
- 6. Local land

MOUNTING TO CONCRETE / ASPHALT

Installation description

- 1. ZANO product
- Quick-attachment / quickattachment or chemical anchor
- **3.** Fixed restrained surface, such as concrete or asphalt
- 4. Concrete foundation of C16/20 class (top surface of concrete 10 cm below paving surface)
- 5. Stone aggregate substructure
- Sand ballast (approximately 2 4 cm)
- 7. Local land

MOUNTING TO CONCRETE FOUNDATION

Installation description

- 1. ZANO product
- 2. Quick-attachment / quickattachment or chemical anchor
- 3. Concrete foundation of C16/20 class (top surface of concrete 10 cm below paying surface)
- 4. Local land