



OPTIONS

Construction:

- carbon steel (s235Jr)

Mounting method:

- to be grouted in

Ears for chain attachment:


- no
- attachment of 1 chain (both sides)
- attachment of 1 chain (end)
- attachment of 2 chains (both sides)
- attachment of 2 chains (final)

Fence mounts:

- one-sided
- double-sided
- no

DESCRIPTION

The Largeguard post is built from three iron castings and pipes in two sizes, fi11.4 and fi16. It accommodates one or two chains, tailored to its intended use. The Largo 01.057 is ideal for enclosing areas like monuments, fountains, plazas, and historic city zones.



GENERAL TECHNICAL DATA

Dimensions:

- height from ground surface: 39 1/4 in
- height with anchor section: 53 1/4 in

Materials:


- cast iron
- steel tubes

ZANO




Product: Post Largo
 Catalog number: **01.057**
 Designer: Tomasz Szpytma

In accordance with the Polish Law on Copyright and Related Rights of 04.02.1994 (Official Journal of Laws No. 24, item 83, corrected: Journal of Laws No. 43, item 170) and in accordance with the EU copyright legislation including all EU directives and regulations on copyright, Zano Mirosław Zarotynski Company, reserves the copyright of drawings, descriptions, 3D models, renderings, graphics, content contained in offers, attachments to offers and all other documents. Its content is the intellectual property of ZANO Mirosław Zarotynski company. The use of author's ideas, solutions, copying, distribution of photos, graphics or fragments of graphics, descriptive texts, for profit, without the permission of the author - ZANO Mirosław Zarotynski company - is prohibited and constitutes a copyright infringement and is punishable.



NOTE: The drawings do not reflect the actual dimensions of the foundation. These are only sample installation diagrams taking into account the type of anchoring and the material of the substrate to which to attach the furniture.


The size of the foundation depends on local foundation conditions.

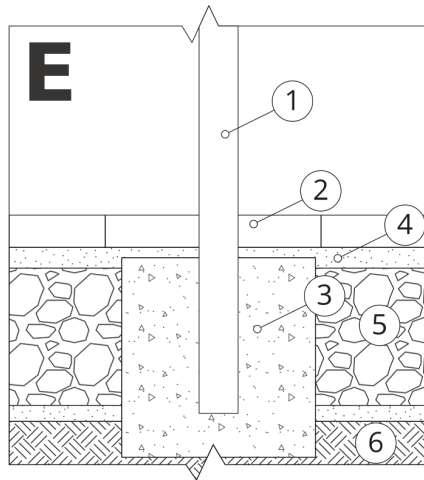

INSTALLATION TO PAVING WITH FOUNDATION

Installation description


1. ZANO product
2. Stone paving / concrete paving / stone slabs / concrete slabs
3. Sand ballast (approximately 2 - 4 cm)
4. Concrete foundation of C16/20 class (top surface of concrete 10 cm below paving surface)
5. Local land

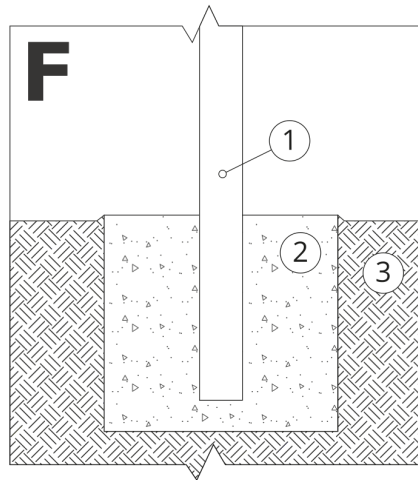

MOUNTING TO CONCRETE FOUNDATION

Installation description

1. ZANO product
2. Concrete foundation of C16/20 class (top surface of concrete 10 cm below paving surface)
3. Local land

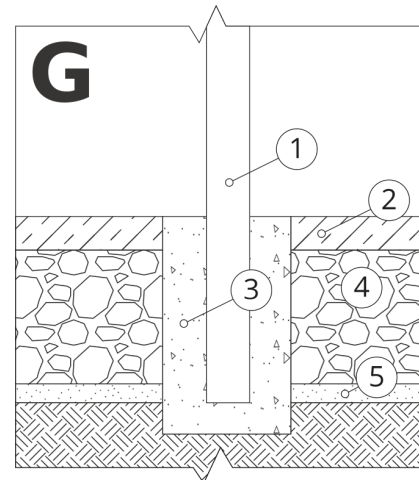

MOUNTING TO CONCRETE FOUNDATION

Installation description

1. ZANO product
2. Fixed restrained surface, such as concrete or asphalt
3. Concrete foundation of C16/20 class (top surface of concrete 10 cm below paving surface)
4. Stone aggregate substructure
5. Sand ballast (approximately 2 - 4 cm)
6. Local land