



## **OPTIONS**

#### Construction:

o stainless steel (Aisi 304)

## Mounting method:

to screw

## Logo:

- o no
- o etched in stainless steel
- cut in steel
- sticker

## **DESCRIPTION**

"KANGU"- Self-service station for ad-hoc repair and cleaning of bicycles. It is designed for self-service bicycle repair and maintenance, as well as cleaning by the user, using the station's design as a base and the brushes and tools included in the equipment.


**Model 18.004.7** features a built-in bicycle stand, a floor pump with a pressure gauge. The station has both repair tools and brushes and a low-pressure washer for washing the bicycle.

The welded construction of **5 mm thick** steel sheets ensures the **stability** and **durability of** the product.

KANG models for washing bicycles are made only and entirely of stainless steel 1.4301 ground.

### **Equipment of the station:**

- ♠ holder made of two stainless steel pipes for hanging the bicycle (pipe dimensions: diameter 42 x 2.6 mm, length 450 mm);
- brushes attached to stainless steel cables (8 mm diameter) in PVC lagging. They are attached to the lines with steel swivels which prevents the tools from tangling;
- low-pressure washer (connection to mains water supply required);
- water tap with timer;
- bike stand
- bike repair tool kit

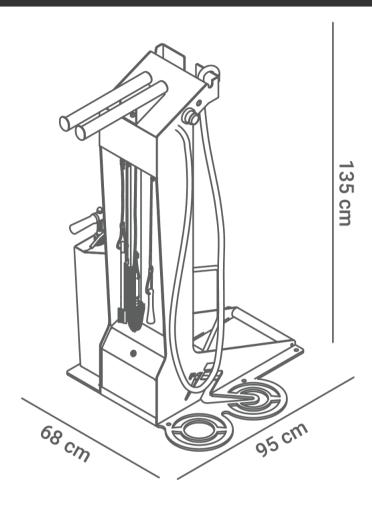

# **GENERAL TECHNICAL DATA**

## **Dimensions:**

- width: 26 <sup>3</sup>/<sub>4</sub> in - height: 53 <sup>1</sup>/<sub>4</sub> in - depth: 37 <sup>1</sup>/<sub>2</sub> in

### Materials:

- construction - stainless steel

# ZANO



Product:


Bicycle washing and repair station Kangu Catalog number: **18.004.7** 

Designer: Filip Babiarz

In accordance with the Polish Law on Copyright and Related Rights of 04.02.1994 (Official Journal of Laws No. 24, item 83, corrected: Journal of Laws No. 43, item 170) and in accordance with the EU copyright legislation including all EU directives and regulations on copyright, Zano Miroslaw Zarotynski Company, reserves the copyright of drawings, descriptions, 3D models, renderings, graphics, content contained in offers, attachments to offers and all other documents. Its content is the intellectual property of ZANO Miroslaw Zarotinski company. The use of author's ideas, solutions, copying, distribution of photos, graphics or fragments of graphics, descriptive texts, for profit, without the permission of the author - ZANO Miroslaw Zarotynski company - is prohibited and constitutes a copyright infringement and is punishable.


NOTE: The drawings do not reflect the actual dimensions of the foundation. These are only sample installation diagrams taking into account the type of anchoring and the material of the substrate to which to attach the furniture.

The size of the foundation depends on local foundation conditions.

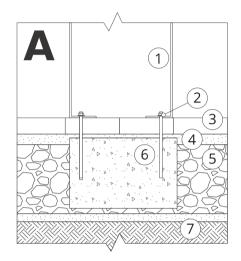





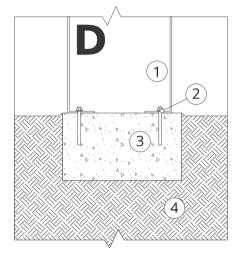

# INSTALLATION TO PAVING WITH FOUNDATION

### Installation description

- 1. ZANO product
- Quick-attachment / quickattachment or chemical anchor
- 3. Stone paving / concrete paving / stone slabs / concrete slabs
- **4.** Sand ballast (approximately 2 4 cm)
- 5. Stone aggregate substructure
- Concrete foundation of C16/20 class (top surface of concrete 10 cm below paving surface)
- 7. Local land

## **MOUNTING TO PAVING**

### Installation description

- 1. ZANO product
- Quick-attachment / quickattachment or chemical anchor
- 3. Stone paving / concrete paving / stone slabs / concrete slabs
- **4.** Sand ballast (approximately 2 4 cm)
- 5. Stone aggregate substructure
- 6. Local land

# MOUNTING TO CONCRETE / ASPHALT

### Installation description

- 1. ZANO product
- 2. Quick-attachment / quickattachment or chemical anchor
- **3.** Fixed restrained surface, such as concrete or asphalt
- 4. Concrete foundation of C16/20 class (top surface of concrete 10 cm below paving surface)
- 5. Stone aggregate substructure
- Sand ballast (approximately 2 4 cm)
- 7. Local land

# MOUNTING TO CONCRETE FOUNDATION

### Installation description

- 1. ZANO product
- 2. Quick-attachment / quickattachment or chemical anchor
- 3. Concrete foundation of C16/20 class (top surface of concrete 10 cm below paying surface)
- 4. Local land