



OPTIONS

Construction:



- carbon steel (s235Jr)
- stainless steel (Aisi 304)

Mounting method:


- free-standing
- to screw

DESCRIPTION

The Tulip flower pot (product number: 06.021.2.M) is the quintessence of modern design in the category of **urban furniture**. It is a product dedicated to public and private spaces, where functionality is combined with aesthetics. The flower pot is made of high-quality steel - a possible choice between carbon steel (S235Jr) and stainless steel (Aisi 304), which ensures long-lasting durability and resistance to various weather conditions. Tulip is characterized by a modern shape, which with its geometric lines will add elegance to any outdoor or indoor space. The product, measuring 75 cm in height and 60 cm in side width, offers a stable structure weighing 37 kg, which ensures solidity and safety of use. The Tulip pot is available in two mounting options: freestanding or screw-on, which allows easy adaptation to a variety of needs and location conditions. It is ideal for urban projects, parks, gardens, as well as commercial spaces such as shopping malls and office spaces. Belonging to the Modern product line, the Tulip pot combines functionality with modern aesthetics, being not only practical but also a decorative element of **urban furniture**. Thanks to its universal design, Tulip blends perfectly with other elements of urban furnishings, creating a coherent and aesthetically appealing environment.



wartości podane są w centymetrach



GENERAL TECHNICAL DATA

Dimensions:

- height: 29 1/2 in
- flank: 23 1/2 in

Weight:

- 82 lb

Materials:


- carbon steel or stainless steel

ZANO

In accordance with the Polish Law on Copyright and Related Rights of 04.02.1994 (Official Journal of Laws No. 24, item 83, corrected: Journal of Laws No. 43, item 170) and in accordance with the EU copyright legislation including all EU directives and regulations on copyright, Zano Mirosław Zarotynski Company, reserves the copyright of drawings, descriptions, 3D models, renderings, graphics, content contained in offers, attachments to offers and all other documents. Its content is the intellectual property of ZANO Mirosław Zarotynski company. The use of author's ideas, solutions, copying, distribution of photos, graphics or fragments of graphics, descriptive texts, for profit, without the permission of the author - ZANO Mirosław Zarotynski company - is prohibited and constitutes a copyright infringement and is punishable.

NOTE: The drawings do not reflect the actual dimensions of the foundation. These are only sample installation diagrams taking into account the type of anchoring and the material of the substrate to which to attach the furniture.


The size of the foundation depends on local foundation conditions.

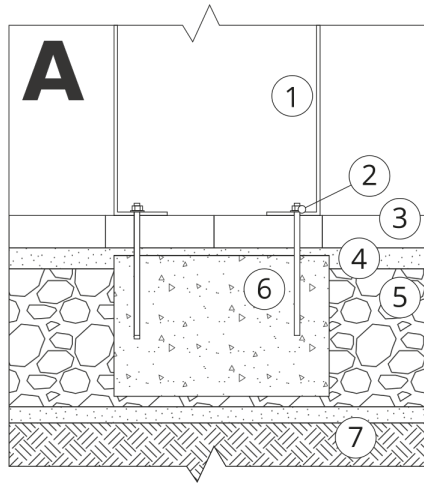

INSTALLATION TO PAVING WITH FOUNDATION

Installation description


1. ZANO product
2. Quick-attachment / quick-attachment or chemical anchor
3. Stone paving / concrete paving / stone slabs / concrete slabs
4. Sand ballast (approximately 2 - 4 cm)
5. Stone aggregate substructure
6. Concrete foundation of C16/20 class (top surface of concrete 10 cm below paving surface)
7. Local land

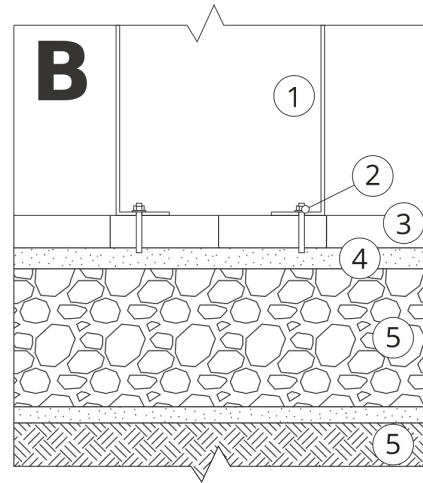

MOUNTING TO PAVING

Installation description


1. ZANO product
2. Quick-attachment / quick-attachment or chemical anchor
3. Stone paving / concrete paving / stone slabs / concrete slabs
4. Sand ballast (approximately 2 - 4 cm)
5. Stone aggregate substructure
6. Local land

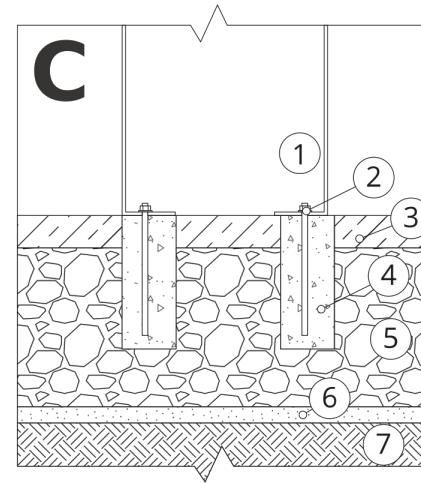

MOUNTING TO CONCRETE / ASPHALT

Installation description

1. ZANO product
2. Quick-attachment / quick-attachment or chemical anchor
3. Fixed restrained surface, such as concrete or asphalt
4. Concrete foundation of C16/20 class (top surface of concrete 10 cm below paving surface)
5. Stone aggregate substructure
6. Sand ballast (approximately 2 - 4 cm)
7. Local land

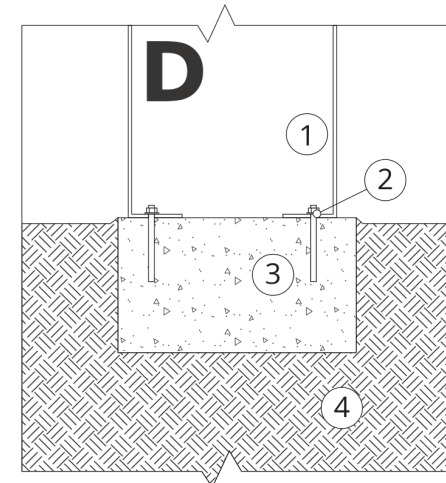

MOUNTING TO CONCRETE FOUNDATION

Installation description

1. ZANO product
2. Quick-attachment / quick-attachment or chemical anchor
3. Concrete foundation of C16/20 class (top surface of concrete 10 cm below paving surface)
4. Local land