
TRAVETTO BENCH 02.407.1 ZANO URBAN FURNITURE



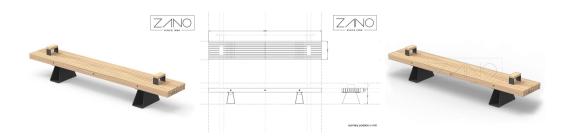

OPTIONS

Construction:

- o carbon steel (s235Jr)
- o stainless steel (Aisi 304)

Seat:

- European coniferous wood
- hardwood of European origin
- oiled exotic wood
- o premium exotic wood

Mounting method:

to screw

DESCRIPTION

The Travetto bench features a sleek design with classic lines that enhance the ambiance of any contemporary urban setting.

Travetto is a bench combining wood with a metal framework, available in either black or stainless steel. Unlike typical benches that stretch 2 meters, the Travetto extends to **3 meters** making it exceptionally distinct from similar offerings.

The vertically placed planks used for seating offer increased resistance to bending. Further stability is provided by a stainless steel bar that maintains consistent spacing between planks and fortifies the structure. Three short planks undergird the bench, offering ample support for the back, making it appear robust without seeming bulky.

A unique aspect of this bench is its modular design, allowing for multiple benches to be linked together, potentially creating a single bench up to 15 meters long. Both the wood and the steel are treated with protective coatings to resist harsh weather conditions, with the steel also featuring durable galvanization and customizable powder coating in any hue from the Ral color chart....

TRAVETTO BENCH 02.407.1 ZANO URBAN FURNITURE





GENERAL TECHNICAL DATA

Dimensions:

- width: 19 ¹/₄ in - length: 117 ³/₄ in - height: 16 ¹/₄ in

Weight: - 306 lb

ZANO





Product: Travetto bench
Catalog number: **02.407.1**Fixerary
Designer: Filip Babiarz


In accordance with the Polish Law on Copyright and Related Rights of 04.02.1994 (Official Journal of Laws No. 24, item 83, corrected: Journal of Laws No. 43, item 170) and in accordance with the EU copyright legislation including all EU directives and regulations on copyright, Zano Mirosław Zarotynski Company, reserves the copyright of drawings, descriptions, 3D models, renderings, graphics, content contained in offers, attachments to offers and all other documents. Its content is the intellectual property of ZANO Mirosław Zarotinski company. The use of author's ideas, solutions, copying, distribution of photos, graphics or fragments of graphics, descriptive texts, for profit, without the permission of the author - ZANO Mirosław Zarotynski company - is prohibited and constitutes a copyright infringement and is punishable.


NOTE: The drawings do not reflect the actual dimensions of the foundation. These are only sample installation diagrams taking into account the type of anchoring and the material of the substrate to which to attach the furniture.

The size of the foundation depends on local foundation conditions.

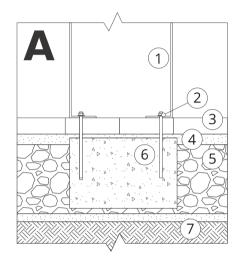



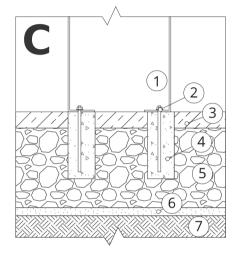

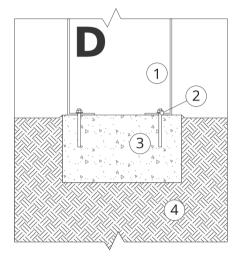

INSTALLATION TO PAVING WITH FOUNDATION

Installation description

- 1. ZANO product
- 2. Quick-attachment / quickattachment or chemical anchor
- **3.** Stone paving / concrete paving / stone slabs / concrete slabs
- **4.** Sand ballast (approximately 2 4 cm)
- 5. Stone aggregate substructure
- **6.** Concrete foundation of C16/20 class (top surface of concrete 10 cm below paving surface)
- 7. Local land

MOUNTING TO PAVING

Installation description

- 1. ZANO product
- Quick-attachment / quickattachment or chemical anchor
- **3.** Stone paving / concrete paving / stone slabs / concrete slabs
- **4.** Sand ballast (approximately 2 4 cm)
- 5. Stone aggregate substructure
- 6. Local land

MOUNTING TO CONCRETE / ASPHALT

Installation description

- 1. ZANO product
- Quick-attachment / quickattachment or chemical anchor
- **3.** Fixed restrained surface, such as concrete or asphalt
- 4. Concrete foundation of C16/20 class (top surface of concrete 10 cm below paving surface)
- 5. Stone aggregate substructure
- Sand ballast (approximately 2 4 cm)
- 7. Local land

MOUNTING TO CONCRETE FOUNDATION

Installation description

- 1. ZANO product
- 2. Quick-attachment / quickattachment or chemical anchor
- 3. Concrete foundation of C16/20 class (top surface of concrete 10 cm below paying surface)
- 4. Local land