PERGOLA MODULE 3 X 3 M 22.101.1 ZANO URBAN FURNITURE







## **OPTIONS**

### **Construction:**

carbon steel (s235Jr)

## Mounting method:

to screw

### Pergola roof:


- European coniferous wood
- hardwood of European origin
- oiled exotic wood
- o premium exotic wood

## **DESCRIPTION**

A pergola is a structure featuring a robust steel frame and horizontal beams, optionally fitted with walls supported by steel cables to facilitate the growth of climbing plants. It serves as an excellent spot for shaded outdoor seating, enhancing the visual charm of gardens, parks, or terraces. Our pergola offers two primary modules, 3 x 3 m and 3 x 2 m, and can be customized with additional modules to meet various client requirements.

The pergola's frame is crafted by bending, welding, and bolting I-beams measuring  $120 \times 114$  mm and rectangular profiles of  $120 \times 80$  mm made from S235Jr carbon steel, which is galvanized and powder coated according to the RAL color chart. The roof is constructed using 17 planks of  $45 \times 70 \times 2740$  mm. Clients can choose planks made from twice-varnished European conifer wood or twice-oiled exotic wood. It's also possible to further customize the pergola's side walls with additional wooden boards or steel cables (finish modules).

PERGOLA MODULE 3 X 3 M 22.101.1 ZANO URBAN FURNITURE

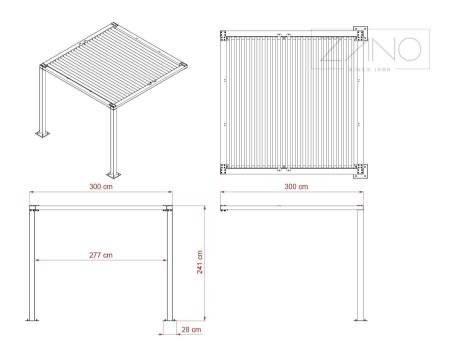

## **GENERAL TECHNICAL DATA**

### **Dimensions:**

- width: 118 in - height: 95 in - depth: 118 in

### Materials:

- wood: European coniferous or exotic wood
- construction stainless steel or carbon steel, galvanized and powder coated

## ZANO



Product:

Pergola module 3 x 3 m


Catalog number: 22.101.1


Designer: Iwona Zaczek


In accordance with the Polish Law on Copyright and Related Rights of 04.02.1994 (Official Journal of Laws No. 24, item 83, corrected: Journal of Laws No. 43, item 170) and in accordance with the EU copyright legislation including all EU directives and regulations on copyright, Zano Mirosław Zarotynski Company, reserves the copyright of drawings, descriptions, 3D models, renderings, graphics, content contained in offers, attachments to offers and all other documents. Its content is the intellectual property of ZANO Miroslaw Zarotinski company. The use of author's ideas, solutions, copying, distribution of photos, graphics or fragments of graphics, descriptive texts, for profit, without the permission of the author - ZANO Mirosław Zarotynski company - is prohibited and constitutes a copyright infringement and is punishable.


NOTE: The drawings do not reflect the actual dimensions of the foundation. These are only sample installation diagrams taking into account the type of anchoring and the material of the substrate to which to attach the furniture.

The size of the foundation depends on local foundation conditions.

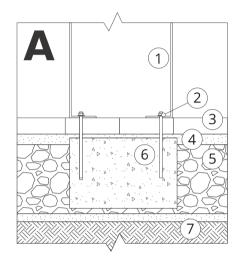



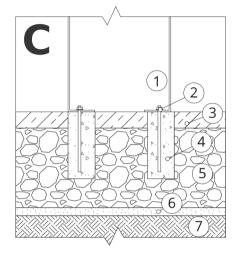

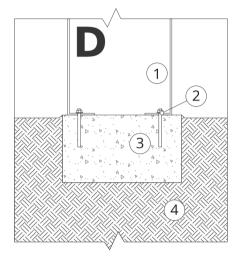

# INSTALLATION TO PAVING WITH FOUNDATION

### Installation description

- 1. ZANO product
- 2. Quick-attachment / quickattachment or chemical anchor
- **3.** Stone paving / concrete paving / stone slabs / concrete slabs
- **4.** Sand ballast (approximately 2 4 cm)
- 5. Stone aggregate substructure
- **6.** Concrete foundation of C16/20 class (top surface of concrete 10 cm below paving surface)
- 7. Local land

## **MOUNTING TO PAVING**

### Installation description

- 1. ZANO product
- Quick-attachment / quickattachment or chemical anchor
- **3.** Stone paving / concrete paving / stone slabs / concrete slabs
- **4.** Sand ballast (approximately 2 4 cm)
- 5. Stone aggregate substructure
- 6. Local land

# MOUNTING TO CONCRETE / ASPHALT

### Installation description

- 1. ZANO product
- Quick-attachment / quickattachment or chemical anchor
- **3.** Fixed restrained surface, such as concrete or asphalt
- 4. Concrete foundation of C16/20 class (top surface of concrete 10 cm below paving surface)
- 5. Stone aggregate substructure
- Sand ballast (approximately 2 4 cm)
- 7. Local land

# MOUNTING TO CONCRETE FOUNDATION

### Installation description

- 1. ZANO product
- 2. Quick-attachment / quickattachment or chemical anchor
- 3. Concrete foundation of C16/20 class (top surface of concrete 10 cm below paying surface)
- 4. Local land